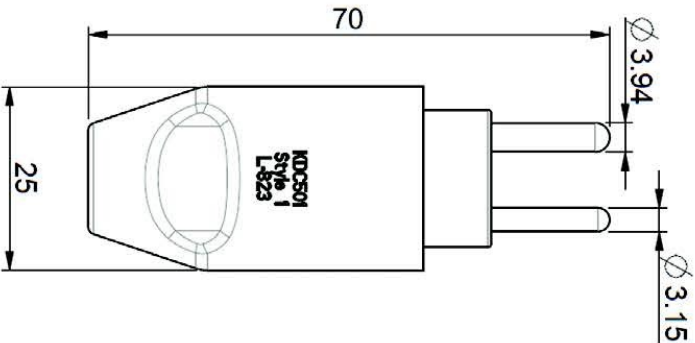

Cable with connector KDC501 EFLA



Product Code	AL - 122- AX Series Indicator (Airfield Lighting) AL Product Indicator 102 Description of product type (Accessory) AX
Description	Two core cable Dual insulation: EPR-insulated & TPE-sheathed Core insulation: special EPR compound Outer sheath: halogen free TPR compound (IEC60752-2 EN50267-2-3) Copper conductors, Class 5 (IEC 60228) Size options: 1.5 mm², 2.5 mm², 4 mm² Nominal voltage: 600 V Temperature range: -40 to +120°C (-40 to 248 ° F) Short term short circuit temperature resistance: 300°C (570°F) Bending radius: 5D FAA L-824 certified Fulfills specifications: MIL-C-3432, MIL-C-4921 & ICEA S-66-524 



Signalight

+40 254 515 465
office@signalight.com

36 Lunca Street, Petrosani,
Hunedoara County, Romania

www.signalight.com