
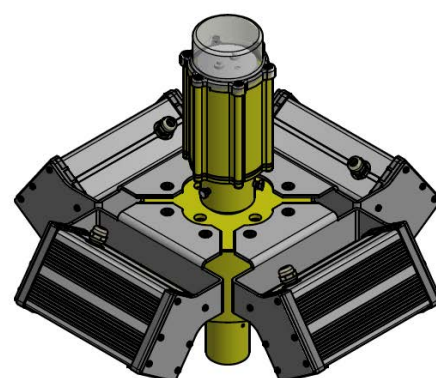
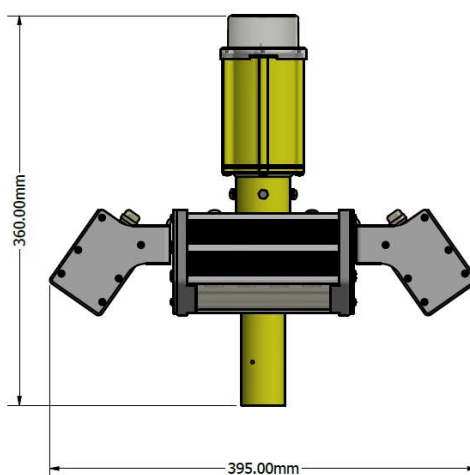


Externally Illuminated Wind Direction Indicator



Product Code	<p>AL - 157- AX</p> <p>Series Indicator (Airfield Lighting) AL</p> <p>Product Indicator 157</p> <p>Description of product type (Accessory) AX</p>
Description	<p>System consisting of a red beacon mounted at the top of the mast with 4 lighting fixtures inclined at 45 degrees.</p> <p>Material: Aluminium</p> <p>Temperature range: - 55° to +55°</p> <p>Ka tested: In accordance with ICAO Annex 14, Volume I and Volume II, Section 5.1.1.</p> <p>Degree of protection: IP66</p> <p>Total power consumption: 60W</p> <p>Power supply: input - 230 VAC output - constant voltage 24 V</p> <p>Compatible: Windcone</p> <p>Cable: 6m</p> <p>Mounting system: 40 mm diameter pipe 3 x M5 bolts</p> <p>Lighting system - ensures minimum 21.5 lux on any point of the horizontal plane described by the complete rotation of the upper surface of a fully extended cone, according to FAA 150/5345-27E.</p> 

Description





Signalight

+40 254 515 465

office@signalight.com

36 Lunca Street, Petrosani,
Hunedoara County, Romania

www.signalight.com