

Polaris Remote Control



Product Code	AL-165-XX-AX Series Indicator (Airfield Lighting) AL Product Indicator 165 Number of controlled groups XX Description of product type (Accessory) AX Example of ordering codes: AL-165-01-AX (1 controlled group) AL-165-02-AX (2 controlled groups) AL-165-03-AX (3 controlled groups) AL-165-EM1-AX (for RGBW – Emergency lights) AL-165-EM2-AX (for RGBW – Emergency lights) 
Description	The radio remote control for Polaris lights is designed to adjust brightness across five levels and turn the lights OFF.
Features	The remote control can be preconfigured at the factory to operate on one of the following frequencies: 868 Mhz for Europe, 915 Mhz for the United States, or optionally 433 Mhz. The range extends up to 10 km in direct line of sight under ideal conditions. The remote control can operate multiple light groups, for example: 2 light groups: THR/END and PAPI 3 light groups: THR/END, PAPI and RWE Also, the remote control can operate the lamps in two modes: - visible mode (lights) - invisible mode (infrared).

**Electrical
Characteristics**



The remote control is powered by a standard 9-volt battery.




**Mechanical
Characteristics**

Material: ABS
Dimensions:

Remote control

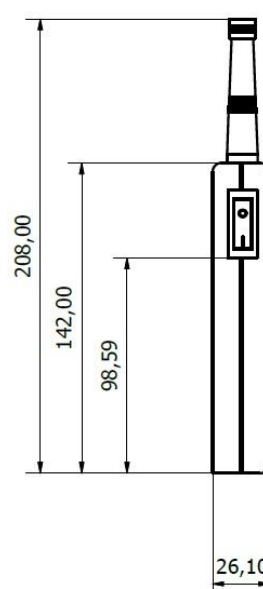

Membrane keypad

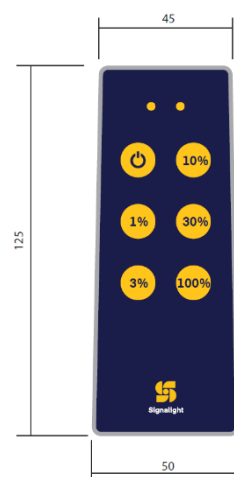



Signalight

+40 254 515 465
office@signalight.com

36 Lunca Street, Petrosani,
Hunedoara County, Romania

www.signalight.com